



CyConnect4G[®]

Asset Management Solution and Secure Gateway

Remotely monitor and manage environmental statistics of assets within real-time with CyConnect4G[®] IoT environmental sensor and remote management solution



Features



REAL-TIME LOCATION AND TRACKING

Know accurate and updated location of your assets



MOVEMENT DETECTION AND GEO FENCING

Embedded Gyro for movement detection and zone violation alerts



REALTIME ENVIRONMENTAL STATISTICS

Remotely manage user-defined Temperature and Humidity statistics



GSM/ 4G LTE COMMUNICATION

Global remote communication




SECURE COMMUNICATION

End to End data encryption from sensor to backend server



MULTIPLE COMPARTMENTS

Supports up to three sensor probes for multiple-compartment monitoring



REDUNDANCY POWER CONTROL

Backup battery in case of power failure

Product Description

CyConnect4G[®] is a secure asset management solution and gateway enabling real-time location of valuable assets and their environmental conditions. Valuable assets such as high-value electronics and cold chain perishables such as frozen foods, vegetables and meats, medicines, vaccines, floriculture, and dairy products need to be environmentally controlled when in storage or transit to preserve their quality.

The CyConnect4G[®] is a combined sensor and communication gateway for remote asset management, including monitoring of critical environmental parameters and the location of assets. Temperature, humidity, Tilt, and movement/ shock can be accurately measured with preset alarm parameters for immediate notification of alarms outside the set parameters.

Accurate environmental statistics and asset location are encrypted and sent remotely via GSM or 4G LTE-M to a backend server and can be viewed and managed through the Cypod CyDash[®] IoT management software dashboard. Predefined alarms, messaging parameters, and geofences may be set by the system administrator and managed via PC or any iOS or Android mobile device.

Location services and movement detection help to reduce theft and damage caused by mishandling of the asset.


The CyConnect4G[®] also has a backup battery in case of power failure to ensure continued operation, as well as USB Type B ports to support other types of sensors that may be required.

CyConnect4G[®] has secure internal memory for data logging when no connection is available.

CyConnect4G[®] can be customized to include specific sensor types as well as a mechanical door sensor switch can be used.

The entire CyConnect4G[®] solution can monitor and manage thousands of assets through the Cypod IoT Management Software.

- Eliminate damage or destroyed perishable assets
- Remote real time monitoring of environmental parameters
- Eliminate theft with real time movement notification
- Preventive Maintenance by monitoring history logs
- Manage thousands of assets on-site or remotely
- Customized messaging and alerts via phone, email and sms
- Location Positioning via GPS and 4G Triangulation

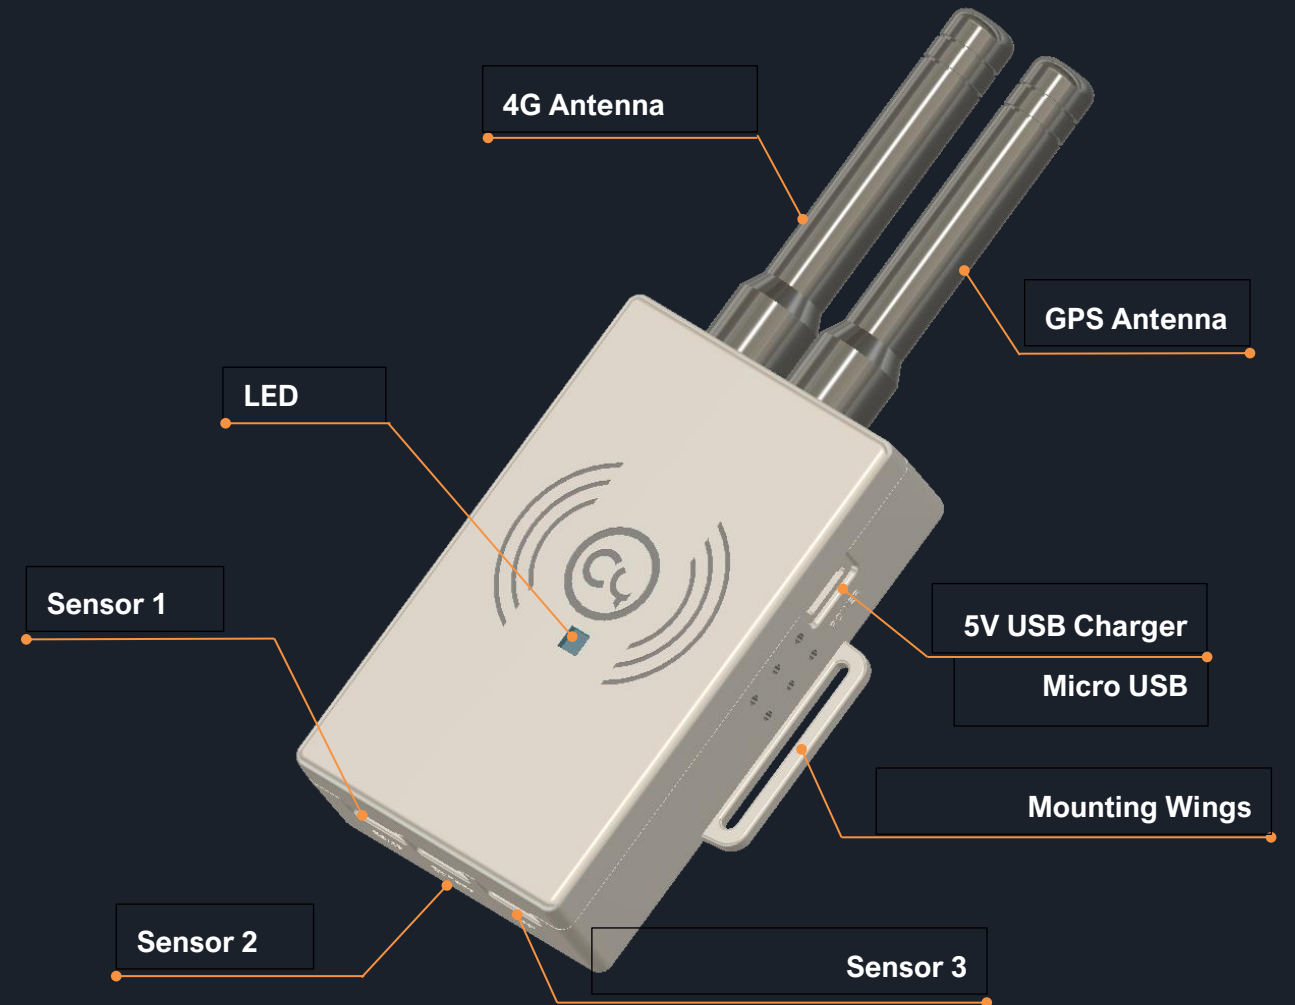

 Remote Environmental Monitoring



 Theft Protection



 Asset Administration and Management

Use Cases

CyConnect4G® can be used for remote monitoring of a variety of different asset types and use cases. Any asset which requires remote environmental monitoring, asset identification and location such as foods, medicines, beverage products, dairy and confections, sensitive high-value electronics, and server rooms, for example, will benefit from the CyConnect4G® solution.

Technical Specifications

Type	Specification
Dimensions	L 77 mm (133 mm with antenna) X W 47.2 mm X H 20.5 mm
Weight	73 grams
Operational/Storage Temperature	-20 °C /+60 °C
Operational/Storage Humidity	Humidity 5-95% RH Non-Condensing
Input Voltage	+5 VDC
Power Supply	External with Micro USB-B input 90-264 VAC 47-63 hz Output: 5v/5w
Battery	600 mAh Lithium-Ion Polymer (LiPo) rechargeable battery
Communication	GSM 2G/4G LTE Cat M1 and LTE Cat NB2
Memory	FLASH Memory IC 16 Mbit
Sensor Types	
Temperature	-40 to +85°C ±0.5°C accuracy
Humidity	0-100% ±3% Relative
Accelerometer	Acceleration range: ±2g/±4g/±8g/±16g Optical
Door	Mechanical switch driving interrupt (external)
Positioning	4G triangulation and GPS
Security	AES-128: Encrypt/Decrypt